

Data sheet


Ultra-Low Freezer ZLN-UT 200 Smart



The photo above is for reference only, may show additional options not included in standard equipment. The real appearance, particularly color and structure of the material may differ from the ones presented in the photo.

Advantages of the SMART controller:

- 4,3", clear, full colour touch screen
- LAN, USB ports for data transfer
- multi-segment time and temperature programs
- visual and sound alarm
- internal memory for programs and data storage
- event registry
- user manual for direct download
- Quick change of program parameters
- Alarm Bar
- operating with gloves on

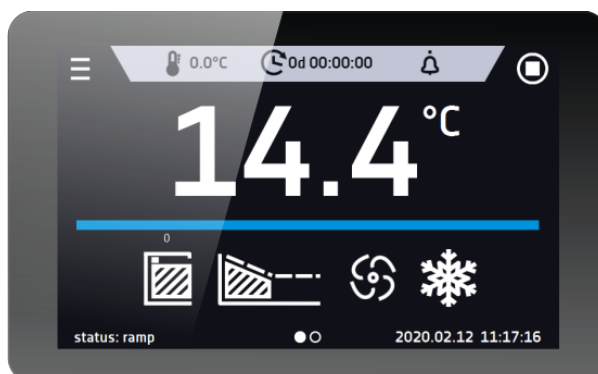

Smart - preview screen

TECHNICAL DATA

air convection	natural
chamber capacity [l]	242
number of boxes 133x133x50mm [pcs]	144
controller	microprocessor PID
display	4,3" full colour touch screen

TEMPERATURE


temperature range [°C]	-86...-50
temperature resolution every ... [°C]	0,1
cooling time from +20°C to -80°C [h]	3,5
heating time in case of power failure -80°C to -60°C [h]	1,5
temperature fluctuation at -80°C [±/°C]*	1,5
temperature variation at -80°C [±/°C]*	4

CHAMBER

door type	solid
interior	
C Smart	stainless steel to DIN 1.4016
P Smart	acid-proof stainless steel to DIN 1.4301
housing	
C Smart	powder coated sheet
P Smart	powder coated sheet

overall dims [mm] /1/

width A	880
height B	1630
depth C	950
internal dims [mm]	
width D	520
height E	830
depth F	560
height I	240

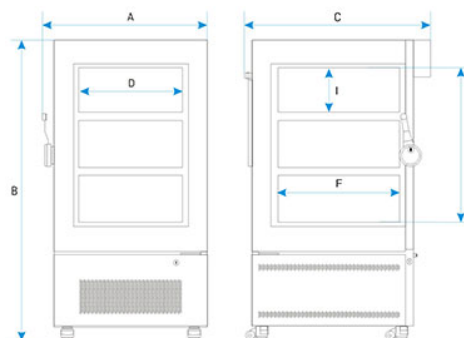

max shelf workload [kg] /2/	10
number of internal chambers	3
max unit workload [kg]	65
weight [kg]	180

ELECTRICAL PARAMETERS

voltage**	230V 50Hz
nominal power [W]	2100
refrigerant	R290 / GWP=3 R170 / GWP=6
warranty	24 months
manufacturer	POL-EKO-APARATURA
txt_opis pod tabelą	all the above technical data refer to standard units (without optional accessories) * - fluctuation measured in centre of the chamber; in space, variation (K) calculated for chamber as: K= +/- (T average max. - T average min.) / 2 ** - other power supplies on request 1 - depth doesn't include 50 mm of power cable
PL typ urządzenia	Ultra-Low Freezer


all the above technical data refer to standard units (without optional accessories)

* - fluctuation measured in centre of the chamber; in space, variation (K) calculated for chamber as:

K= +/- (T average max. - T average min.) / 2

** - other power supplies on request

1 - depth doesn't include 50 mm of power cable

OPTIONS AND ACCESSORIES

Order number: OCZ/N

Non-standard access port for external sensor



Order number LabDesk

LabDesk software