

# Thermo Scientific Orion Star A212

Advanced conductivity benchtop meter

The Thermo Scientific™ Orion™ Star A212 Conductivity Benchtop Meter works for any lab or application. Its durability and dependability make it ideal for every sample, every day.



The Thermo Scientific Orion Star A212 Conductivity Benchtop Meter is the ideal choice for any lab. Get the information you need quickly and easily from the large, backlit graphic LCD display. Informative display shows conductivity/TDS/salinity/resistivity and temperature with time, date, sample ID, user ID and calibration info.

## Features and Benefits

- Easy meter operation assured with on-screen text prompts, menu-specific function keys and a multi-language interface
- Don't miss a reading—AUTO-READ™ locks in the stable reading on your screen, ready indicator alerts when readings are stable and timed reading gathers data in specific time intervals
- Automatic or manual conductivity calibration and auto-ranging measurements for high accuracy across all conductivity ranges
- Selectable reference temperatures of 5, 10, 15, 20 or 25 °C with linear, non-linear or EP curve options for temperature compensated conductivity readings
- Non-volatile memory holds up to 2000 data points with time and date stamp
- Easily transfer data and keep meter software up-to-date with the USB and RS232 ports and complimentary Orion Star Com computer software
- Stir samples with ease using the meter-controlled Orion Star stirrer probe (Cat. No. 096019)
- Included electrode arm and holder make it easier to maintain and place probes into samples
- Power the meter using the included universal power adapter or four AA batteries (sold separately)
- IP54-rated housing handles splashes and is wall-mountable to save space
- 3 year meter replacement warranty


**Thermo**  
SCIENTIFIC

## Thermo Scientific Orion Star A212 Conductivity Benchtop Meter

Specifications	
<b>Conductivity</b>	<b>Range:</b> 0.001 $\mu$ S to 3000 mS <b>Resolution:</b> 0.001 $\mu$ S minimum, auto ranging, up to 4 significant digits <b>Relative Accuracy:</b> 0.5 % of reading $\pm 1$ digit > 3 $\mu$ S, 0.5 % of reading $\pm 0.01$ $\mu$ S $\leq$ 3 $\mu$ S <b>Reference Temperature:</b> 5, 10, 15, 20, 25 $^{\circ}$ C <b>Temperature Compensation:</b> Linear (0 to 10.0 %/ $^{\circ}$ C), nonlinear nLFn & nLFu, EP (USP), off <b>Compatible Cell Constants:</b> 0.001 to 199.9 <b>Calibration Points:</b> Up to 5 points <b>Calibration Editing:</b> Yes
<b>Resistivity</b>	<b>Range:</b> 2 ohm to 100 meg-ohm <b>Resolution:</b> 1 ohm or 0.1 meg-ohm, auto ranging <b>Relative Accuracy:</b> 0.5 % reading $\pm 1$ digit
<b>Salinity</b>	<b>Type:</b> Practical salinity or natural sea water <b>Range:</b> 0.06 to 80.00 psu, 0.05 to 42.00 ppt <b>Resolution:</b> 0.01 psu, 0.01 ppt <b>Relative Accuracy:</b> 0.5 % reading $\pm 1$ digit
<b>TDS</b>	<b>Range:</b> 0.001 to 200.0 ppt <b>Resolution:</b> 0.001 ppt minimum, auto ranging, up to 4 significant digits <b>Relative Accuracy:</b> $\pm 0.5$ % reading $\pm 1$ digit <b>TDS Factor Range:</b> Linear, 0.02 to 9.99
<b>Temperature</b>	<b>Range:</b> -5 to 105 $^{\circ}$ C, 23 to 221 $^{\circ}$ F <b>Resolution:</b> 0.1 $^{\circ}$ C, 0.1 $^{\circ}$ F <b>Relative Accuracy:</b> $\pm 0.1$ $^{\circ}$ C, $\pm 0.1$ $^{\circ}$ F <b>Offset Calibration:</b> 1 point
<b>Datalogging</b>	<b>Memory:</b> 2000 with time and date stamp <b>Log Function:</b> Manual, ready (includes AUTO-READ), timed
<b>Inputs</b>	<b>Conductivity Probe with Built-in Temperature:</b> 8-pin mini-DIN
<b>Output</b>	RS232, USB
<b>Power</b>	<b>AC Adapter:</b> Included—universal, 100-240 VAC <b>Battery Power:</b> Optional—4 AAs <b>Battery Life:</b> 800 hrs

Meter Ordering Information	
<b>Part No.</b>	<b>Description</b>
<b>STARA2120</b>	<b>Orion Star A212 Conductivity Benchtop Meter</b> - Attached electrode stand and holder - Universal power adapter - Printed quick start guide and literature CD - USB computer cable
<b>STARA2125</b>	<b>Orion Star A212 Conductivity Benchtop Meter Kit</b> - 013005MD Orion DuraProbe conductivity probe, K=0.475 - Orion 1413 $\mu$ S conductivity standard - Attached electrode stand and holder - Universal power adapter - Printed quick start guide and literature CD - USB computer cable
<b>STARA2126</b>	<b>Orion Star A212 Conductivity Benchtop Meter Kit for Ultrapure Water</b> - 013016MD Orion conductivity probe with flow-through cell, K=0.1 - Orion 100 $\mu$ S conductivity standard - Attached electrode stand and holder - Universal power adapter - Printed quick start guide and literature CD - USB computer cable

Accessories Ordering Information	
<b>Part No.</b>	<b>Description</b>
<b>096019</b>	Orion Star stirrer probe
<b>STARA-BEA</b>	Orion Star A series electrode arm, holder and benchtop meter-attachable base plate
<b>STARA-HB</b>	Orion Star A series freestanding base for electrode arm and holder
<b>013005MD</b>	Orion DuraProbe conductivity probe, 4-cell, K=0.475
<b>013016MD</b>	Orion 2-cell conductivity probe with flow cell, K=0.1
<b>011008</b>	Orion 100 $\mu$ S conductivity standard, 5 x 60 mL
<b>011007</b>	Orion 1413 $\mu$ S conductivity standard, 5 x 60 mL
<b>011006</b>	Orion 12.9 mS conductivity standard, 5 x 60 mL
<b>1010001</b>	Orion conductivity calibration resistor kit

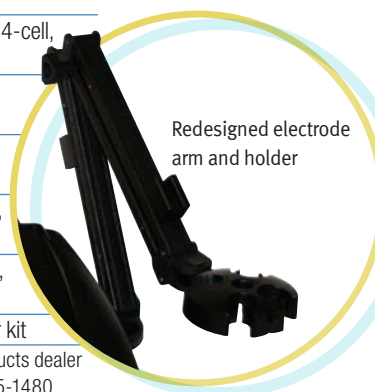

Redesigned electrode arm and holder

For more information, contact your local Thermo Scientific products dealer or call our customer and technical service experts at 1-800-225-1480 (for the US and Canada) or visit [www.thermoscientific.com/water](http://www.thermoscientific.com/water).



[thermoscientific.com/water](http://thermoscientific.com/water)

© 2013 Thermo Fisher Scientific Inc. All rights reserved. Certified System StandardsMark logo is a trademark of SAI Global. All other trademarks are the property of Thermo Fisher Scientific Inc. & its subsidiaries



### Water Analysis Instruments

**North America**  
Toll Free: 1-800-225-1480  
Tel: 1-978-232-6000  
[info.water@thermo.com](mailto:info.water@thermo.com)

**Netherlands**  
Tel: (31) 020-4936270  
[info.water.uk@thermo.com](mailto:info.water.uk@thermo.com)

**China**  
Tel: (86) 21-68654588  
[wai.asia@thermofisher.com](mailto:wai.asia@thermofisher.com)

**India**  
Tel: (91) 22-4157-8800  
[wai.asia@thermofisher.com](mailto:wai.asia@thermofisher.com)

**Singapore**  
Tel: (65) 6778-6876  
[wai.asia@thermofisher.com](mailto:wai.asia@thermofisher.com)

**Japan**  
Tel: (81) 045-453-9175  
[wai.asia@thermofisher.com](mailto:wai.asia@thermofisher.com)

**Australia**  
Tel: (613) 9757-4300  
in Australia (1300) 735-295  
[InfoWaterAU@thermofisher.com](mailto:InfoWaterAU@thermofisher.com)

**Thermo**  
SCIENTIFIC

Part of Thermo Fisher Scientific